

DNB1445DFZWB

Face Detection 2MP

IP D/N IR Bullet Camera

H.265/H.264 Triple Stream



DESCRIPTION

The DNB1445DFZWB Series are 1/1.9" Starvis CMOS, 2MP Network IP Day/Night Face Detection IR Bullet Cameras with NTSC/PAL output. Vandal resistant units are designed with high quality Encoder H.265 / H.264 / MJPEG video compression and configurable triple stream outputs at 50/60fps 2MP (1920x1080). 720p, D1 and CIF Resolution modes are available providing outstanding quality images under ultra-low illumination – Color 0.002Lux/F1.2/0Lux/IR LED on – 10m night vision. Features include ICR, 3DNR, AGC, BLC, AWB, true WDR (120dB), Audio in/out, 3 Alarm In/2 Out, RS-485, SD card slot (128GB) and up to 99% Recognition accuracy on NVR. Configured with Auto Iris 8-32mm motorized vari-focal lenses, ONVIF, impact protection IK10, IP67 and 12VDC/POE+, the DNB1445DFZWB Series 2MP D/N Network IR Bullet Cameras are solutions for demanding Face Detection and Recognition IP video surveillance installations.



FEATURES

- * Network, 2MP, 1920x1080, D/N Face Detection IR Bullet Cameras with NTSC/PAL output
- * 1/1.9" Starvis CMOS Scan Sensor; 120dB WDR
- * Illumination Color 0.002Lux/F1.2/0Lux/IR LED on
- * H.265/H.264/MJPEG Triple Stream configurable
- * Supports 50/60fps @ 2MP and 720p Resolution
- * Face Image Capture with multiple attributes: Gender, Age, Mask over mouth, Mustache, Beard, Expressions as happy, calm, sad, rage, surprised
- * Supports up to 99% accuracy on Database NVR
- * Built-in Analytics: Tripwire, Perimeter Protection, Loitering, Abandoned Objects, Missing Objects Face Detection, Scene Change, Camera Tamper
- * 8-32mm DC Auto Iris Vari-Focal Motorized Lenses
- * IR LEDs for Night Vision – 10m Face Detect distance
- * 1 Audio In/1 Out; 3 Alarm In/2 Alarm Out
- * 10/100Mbps Ethernet Compatible RJ-45 Port
- * Waterproof Metal Housing with Sunshield
- * Available with input Voltage 12VDC and POE+
- * Ethernet, Surge Protection; Micro SD Card (128GB)
- * Compliance with CE, FCC, ROHS, ONVIF, IK10, IP67

APPLICATIONS

- * Homeland Security
- * Correctional Centers
- * Petrochemical Industry
- * Corporate and Banking
- * Casinos and Hospitality
- * Health Care Centers
- * Schools and Universities
- * Government and Military
- * Power Generating Plants
- * Traffic Surveillance (ITS)

ORDERING INFORMATION

DNB1445FDAZW-S4B IP 2MP, D/N ANPR Bullet Camera, 8-32mm lens 10m, NTSC, 12VDC/POE

DNB1445FDBZW-S4B IP 2MP, D/N ANPR Bullet Camera, 8-32mm lens 10m, PAL, 12VDC/POE



www.dantesecurity.net

Lynbrook, NY USA

sales@dantesecurity.net

DNB1445DFZWB


Face Detection 2MP

IP D/N IR Bullet Camera

H.265/H.264 Triple Stream



DNA1445DFZWB	Product Specifications
Image Sensor:	2MP 1/1.9" Starvis CMOS Progressive Scan Image Sensor with WDR
Effective Pixels:	1920(H)×1080(V)
Minimum Illumination:	Color 0.002LUX/F1.2 / 0Lux(IR ON)
S/N Ratio:	> 50 dB
Dynamic Range:	True WDR 120dB
Auto Iris Control:	DC only
Lens /IR Night Vision:	8 ~ 32mm Vari-Focal Auto Iris IR LED ON; 10m face detect distance
Digital Signal Processing:	High End Encoder with Reset Function
Video Compression:	H.265/H.264/MJPEG, Triple Stream, Configurable
Video Resolution:	2MP (1920 x 1080), 720p, D1, CIF
Video Frame Rate:	50/60fps @ 2MP, 720p
Video Output:	BNC, 1V p-p, NTSC and PAL Versions
Audio Function:	Audio Input / Audio Output
Audio Rate/ Compress.:	16kHz/32kHz/44.1kHz/48 kHz; G.711/G.722.1/G.726/MP2L2
Features:	ICR, 3DNR, AGC, BLC, AWB, true WDR (120dB)
Network Interface:	10/100 Mbps RJ-45 Port
Network Protocol:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6
Smart Phone/Appliance:	iPhone, iPad and Android
Web Server:	Intuitive Browser Interface
Built-in Analytics:	Tripwire - Motion Detection with alarm recording, Cross Warning Zone, Perimeter protection, loitering, abandoned objects, missing objects detection, face detection, scene detection, tamper detection, camera tamper warning message
CPU Requirement/OS:	Intel Core i7 2.4GHz/Linux with DNA3700DF, DNA3800DF Recognition NVR
Alarm Functions:	3 Alarm Input / 2Alarm Output
Micro SD Card Slot:	Supports Local Recording - max 128GB
Power Supply:	12VDC - 20W (IR ON); Power over Ethernet
Operating Temperature:	-40°F ~ 140°F (-40°C ~ 60°C)
Operating Humidity:	0-95% non-condensing
Dimensions L x W x H:	18" (457mm) X 4.9" (124.3mm) 4.25" 108mm) w/bracket
Weight:	7.6 lbs. (3.4Kg)
Materials:	Metal; Vandal, Waterproof
Regulatory Compliance:	CE, FCC, ROHS, ONVIF, IK10, IP67
Manufactured to:	ISO9001:2000 Standards

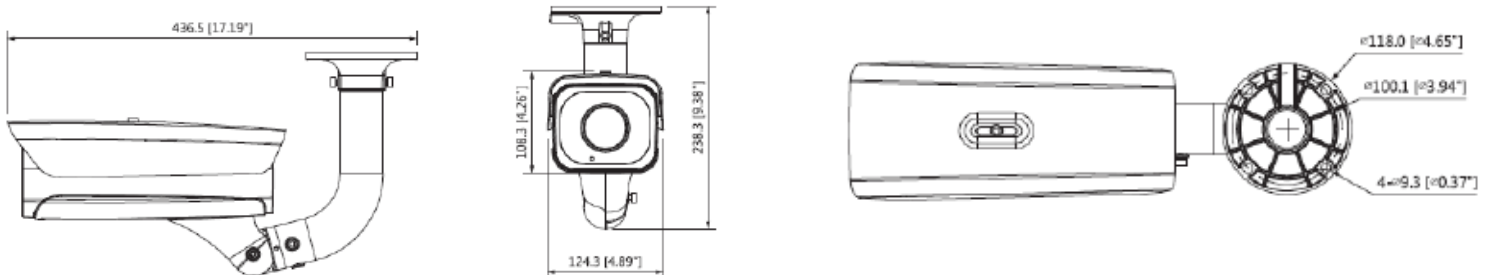

www.dantesecurity.net

Lynbrook, NY USA

sales@denteseecurity.net