

DNA2204M-DNA2208M Mobile NVR Appliance 4/8xIP POE inputs GPS/4G/WIFI



DESCRIPTION

The DNA2204M-2208M Series is an H.265/H.264, dual stream configurable, Network Recoding Mobile Appliance System with 4ch or 8ch IP POE inputs, real time view and record @1080p. Designed with anti-vibration, features include embedded CPU, 2x2.5" SATA HDD, HDMI/VGA/M16 Aviator, 4/8xAudio in/Audio out, 4/8 Alarm in/2 relays out, Video Motion Detection, 3xRS-232, 2xRS-485, 1xRJ-45 (network), 4/8xRJ-45 input POE ports, 3xUSB, CAN port, SD Card; optional GPS, 3G/4G/WIFI Modules. With 6-36VDC, rugged design, Server, Client, optional Central Management Software, Smart Phone interface, ONVIF, DNA2204/8M Series are advanced solutions for Mobile, Network Video Surveillance installations.



FEATURES

- * Mobile Network Video Recording Appliance, LINUX OS, Client DVR like GUI w/SATA HDD
- * High Performance embedded Microprocessor
- * H.265/H.264 Decoding, 1280x1024 Display
- * 4/8 IP Video and 4/8 Audio POE input ports
- * Video Outputs: 1xHDMI, 1xVGA, 1xCAN
- * Data Ports: 3 x RS-232, 2 x RS-485
- * Ethernet Ports: 4/8xRJ45 POE; 1xRJ-45(Net)
- * Display/Record Plate number, Time, Channel, GPS, Speed; Information overlay function
- * Real Time View/Record @1080p resolution
- * Advanced Search and Playback functions
- * Available GPS, WIFI, 3G/4G telecom dependent
- * Up to 8 Alarms Inputs, 2 Relay Outputs
- * Vehicle Event Detection; Video Loss Alarm
- * 2 USB (3.0); 1 USB (2.0); SD Card(256GB)
- * Network Accessibility, Central Management(opt.)
- * Smart phone interface: iPhone, iPad and Android
- * Available with 6VDC - 36VDC input voltage
- * Compliance with CE, FCC, ROHS, ONVIF

APPLICATIONS

- * Police Vehicles
- * Public Buses
- * Fire Dept. Trucks
- * Railways/Subways
- * Commercial Trucks
- * School Buses
- * Utility Vehicles
- * Taxi/Fleet Vehicles
- * Correctional Vehicles
- * Emergency Response

ORDERING INFORMATION

DNA2204MGW4-5 Mobile NVR, 4xIP POE, Audio, Alarms, RS-232, RS-485, GPS/WIFI/4G, 6-36VDC
 DNA2208MGW4-5 Mobile NVR, 8xIP POE, Audio, Alarms, RS-232, RS-485, GPS/WIFI/4G, 6-36VDC

Electrical, Mechanical Specifications

Video/Audio Decode: H.265/ H/264; G.711/PCM
 Video Interface: HDMI/VGA/CAN
 Recording: Synchronous Video/Audio
 Power Supply: 6~36VDC; 15W 4ch/8ch
 Dimension (L x D x H): 7.5"/190mm, 7.5"/190mm, 2.5"/60mm
 Weight (no) HDD: Net 4.5 lbs. (3 Kg)

Environmental

Temperature: 14° F ~ 131° F, -10°C ~ 55°C
 Humidity: 10 ~ 90%
 Vibration Resistance: > 2G rms
 Shock resistance: > 1200G rms
 Input/output Connectors: Aviation multi-pin
 Compliance: CE, FCC, ROHS




www.dantesecurity.net

Lynbrook, NY USA

sales@dantesecurity.net

DNA2204M-DNA2208M
Mobile NVR Appliance
4/8xIP POE inputs
GPS/4G/WIFI

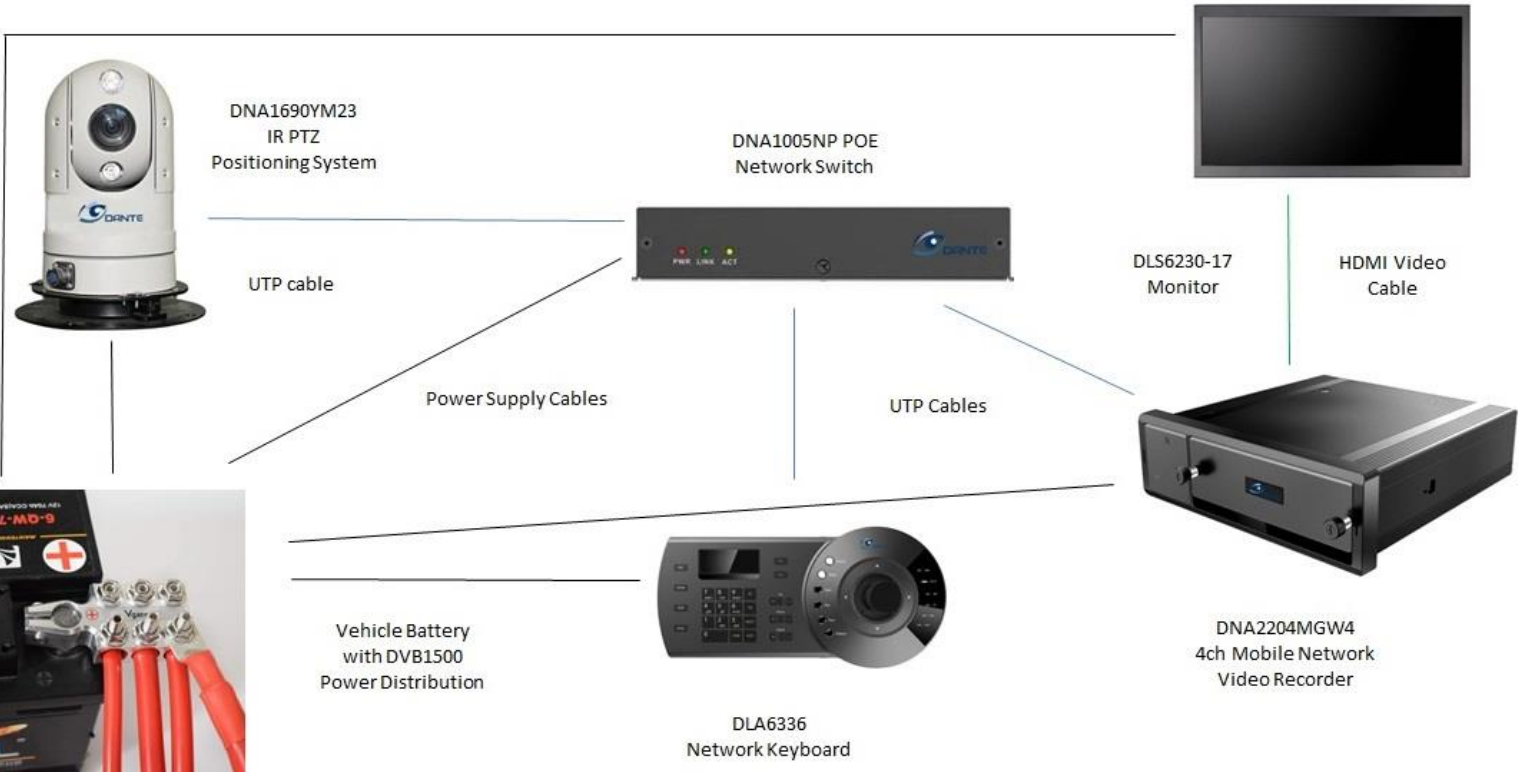

MOBILE VIDEO SURVEILLANCE SYSTEM



www.dantesecurity.net

Lynbrook, NY USA

sales@dantesecurity.net